



| PASSWORD DATABASE |   |   |   |   |   |   |   |
|-------------------|---|---|---|---|---|---|---|
| 1                 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| 1                 | 4 | 1 | 4 | 2 | 1 | 3 | 5 |



3/8

```
<APPLET CODE="HTTP://machineB/pict.class" width="100" height="100">
<PARAM name="ID" value="pict1">
<PARAM name="CGI" value="HTTP://machineB/pict.cgi">
</APPLET>
```

FIG. 5

```
http://machineB/pict.cgi?passwd=12345678&URI="HTTP://machineA/index.html"
&ID=pict1
```

FIG. 6

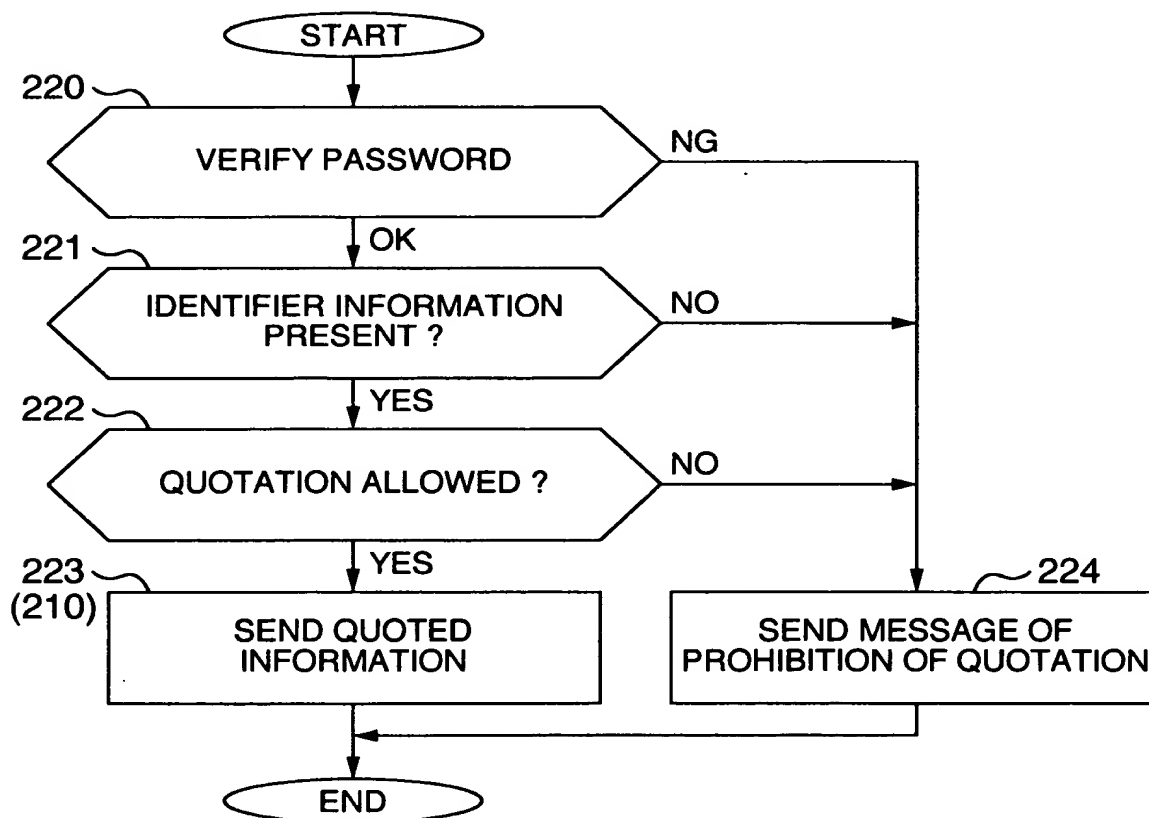




FIG. 10

|                 |
|-----------------|
| 1 0 1 1 1 1 0 0 |
| 1 0 0 1 0 1 1 1 |

ENCRIPTION KEY DATABASE

FIG. 11

[http://machineB/pict.cgi?URI="HTTP://machineA/index.html"&ID=pict1](http://machineB/pict.cgi?URI=)

FIG. 12

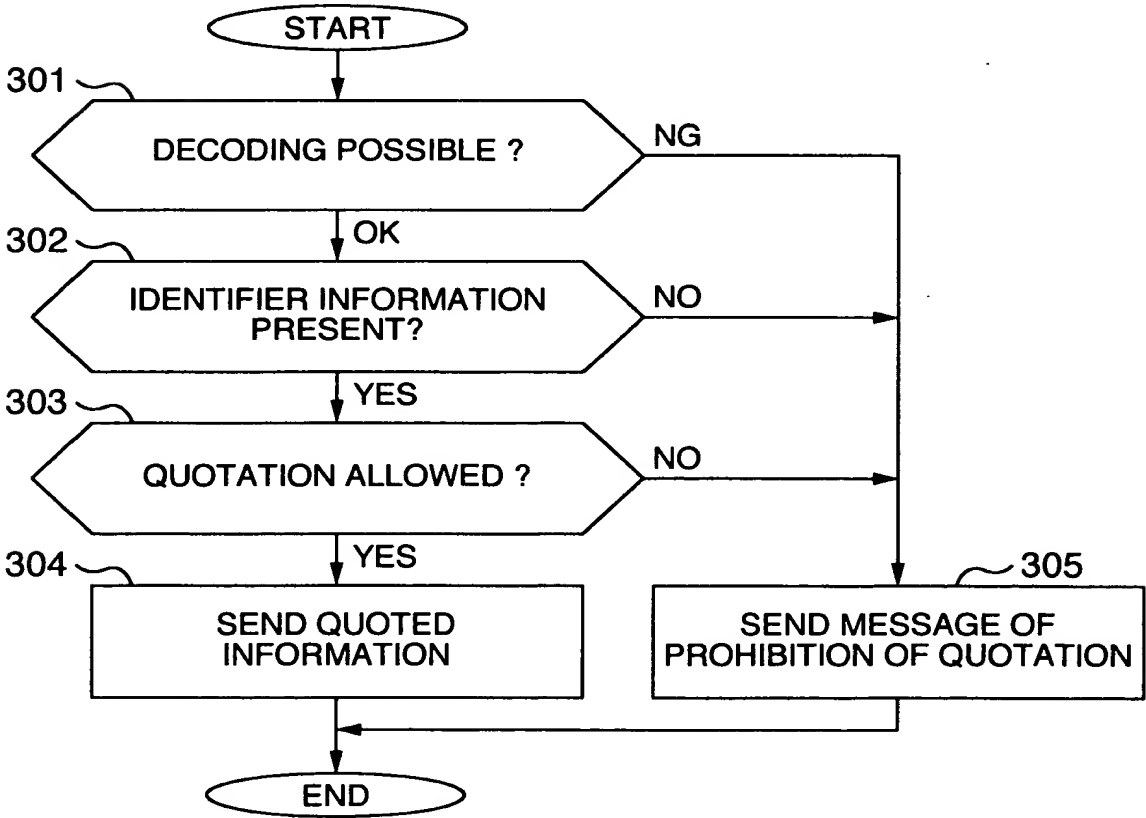


FIG. 13

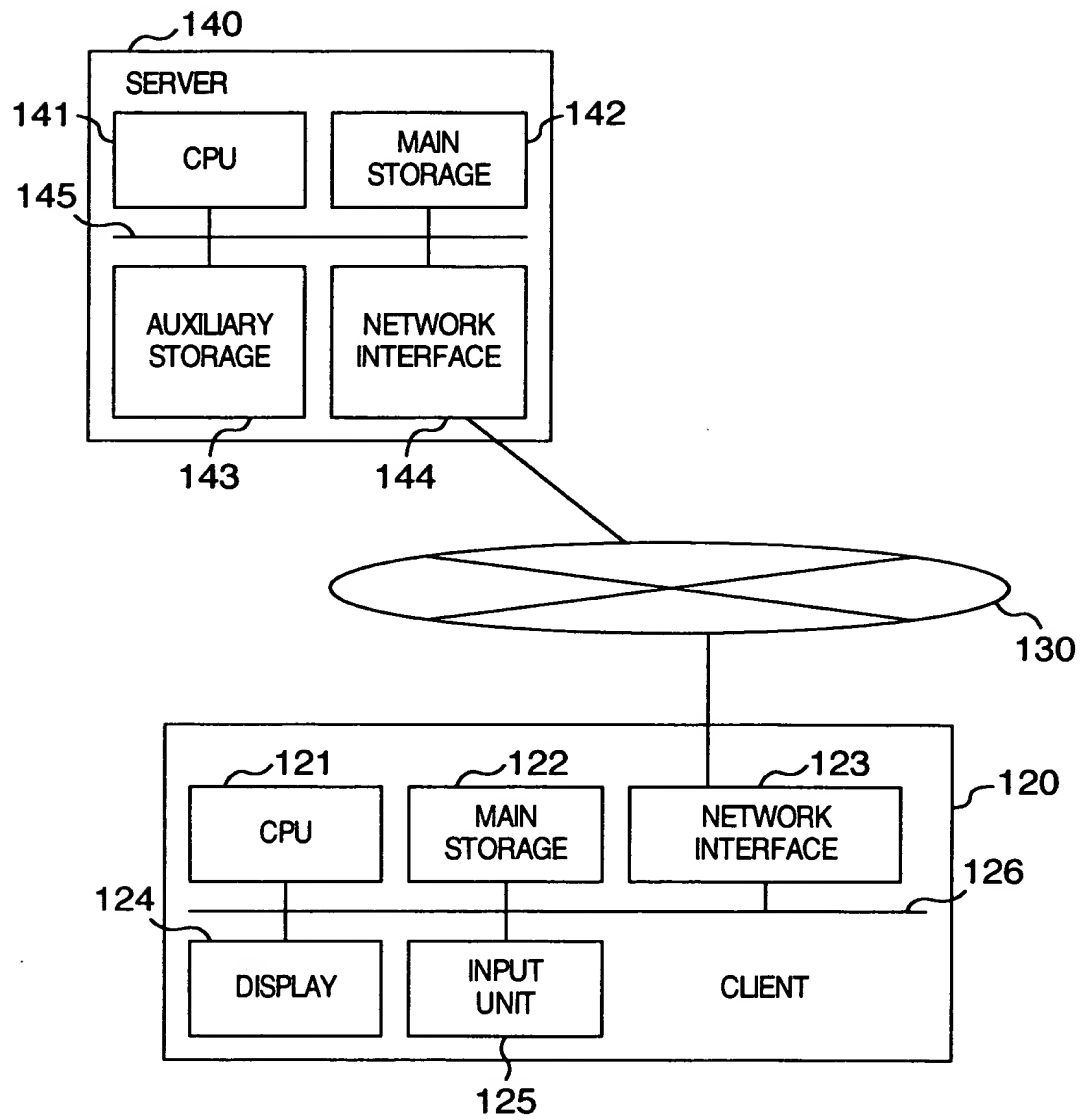


FIG. 14

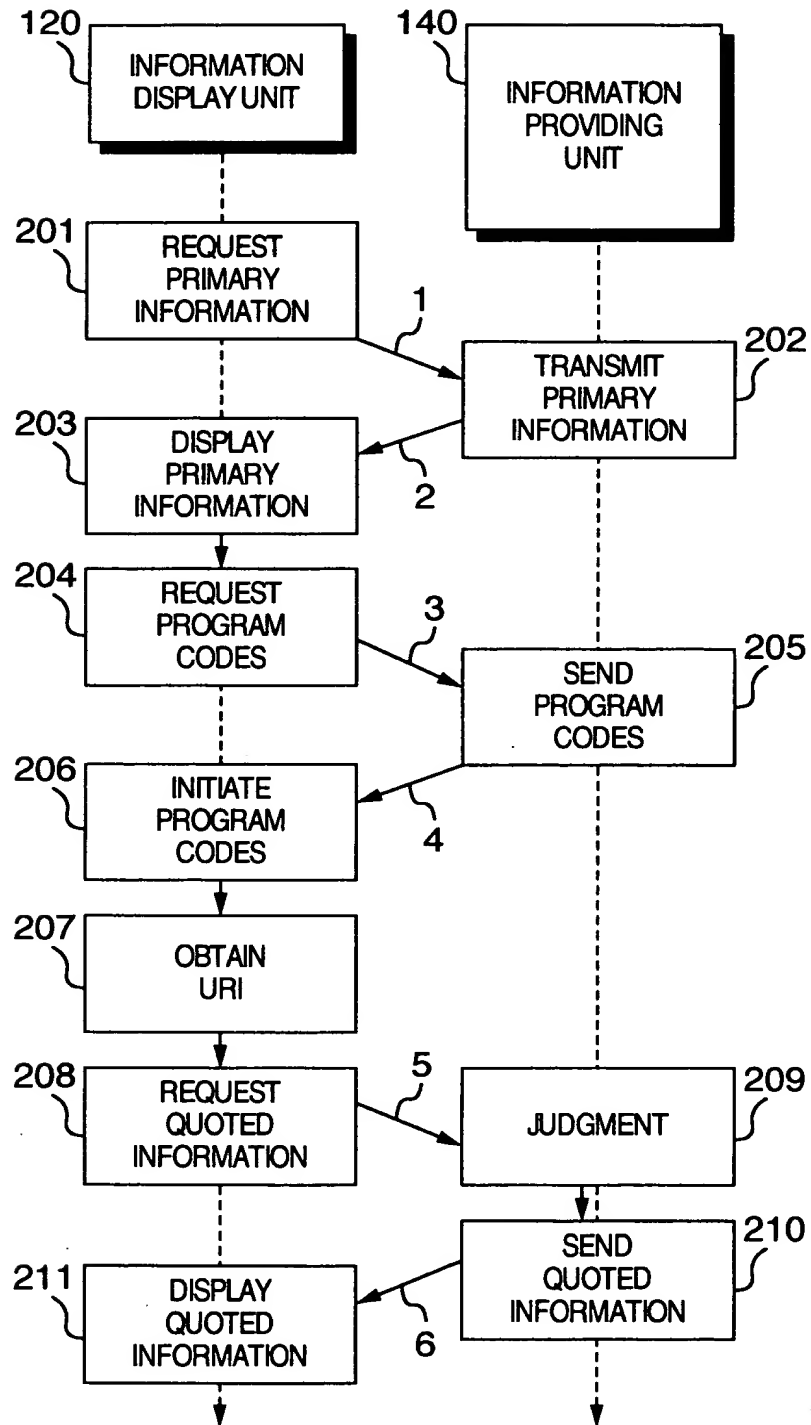


FIG. 15A

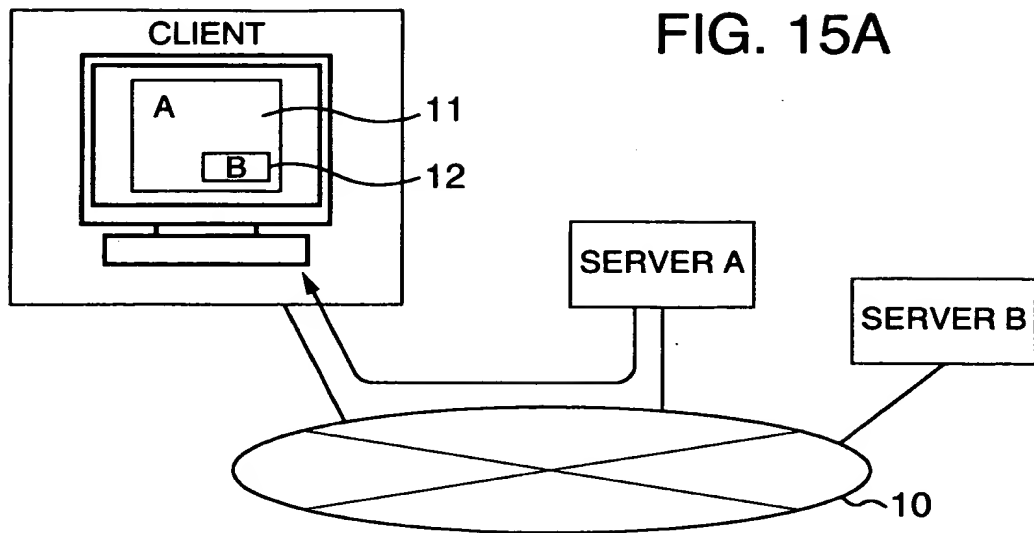


FIG. 15B

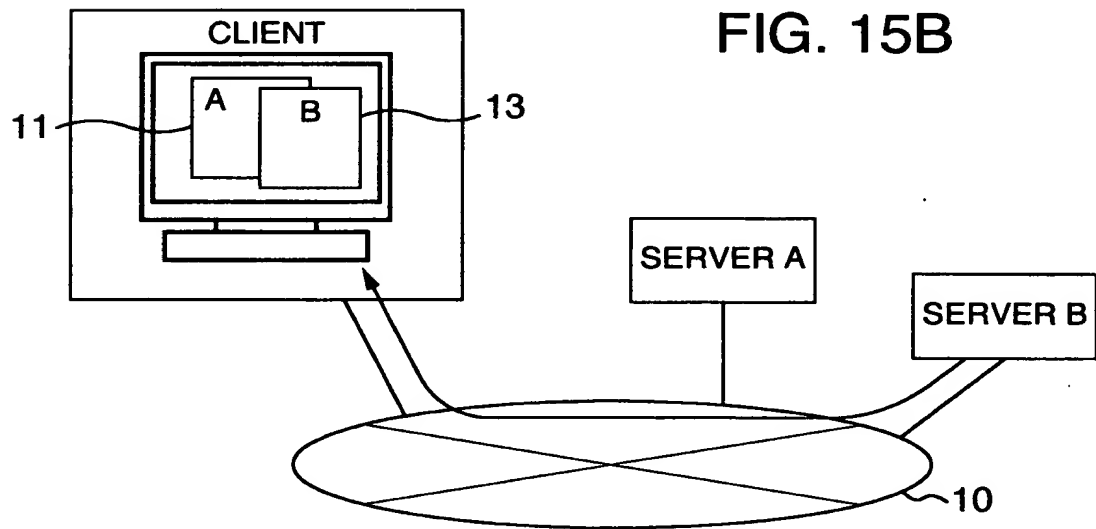


FIG. 15C

